


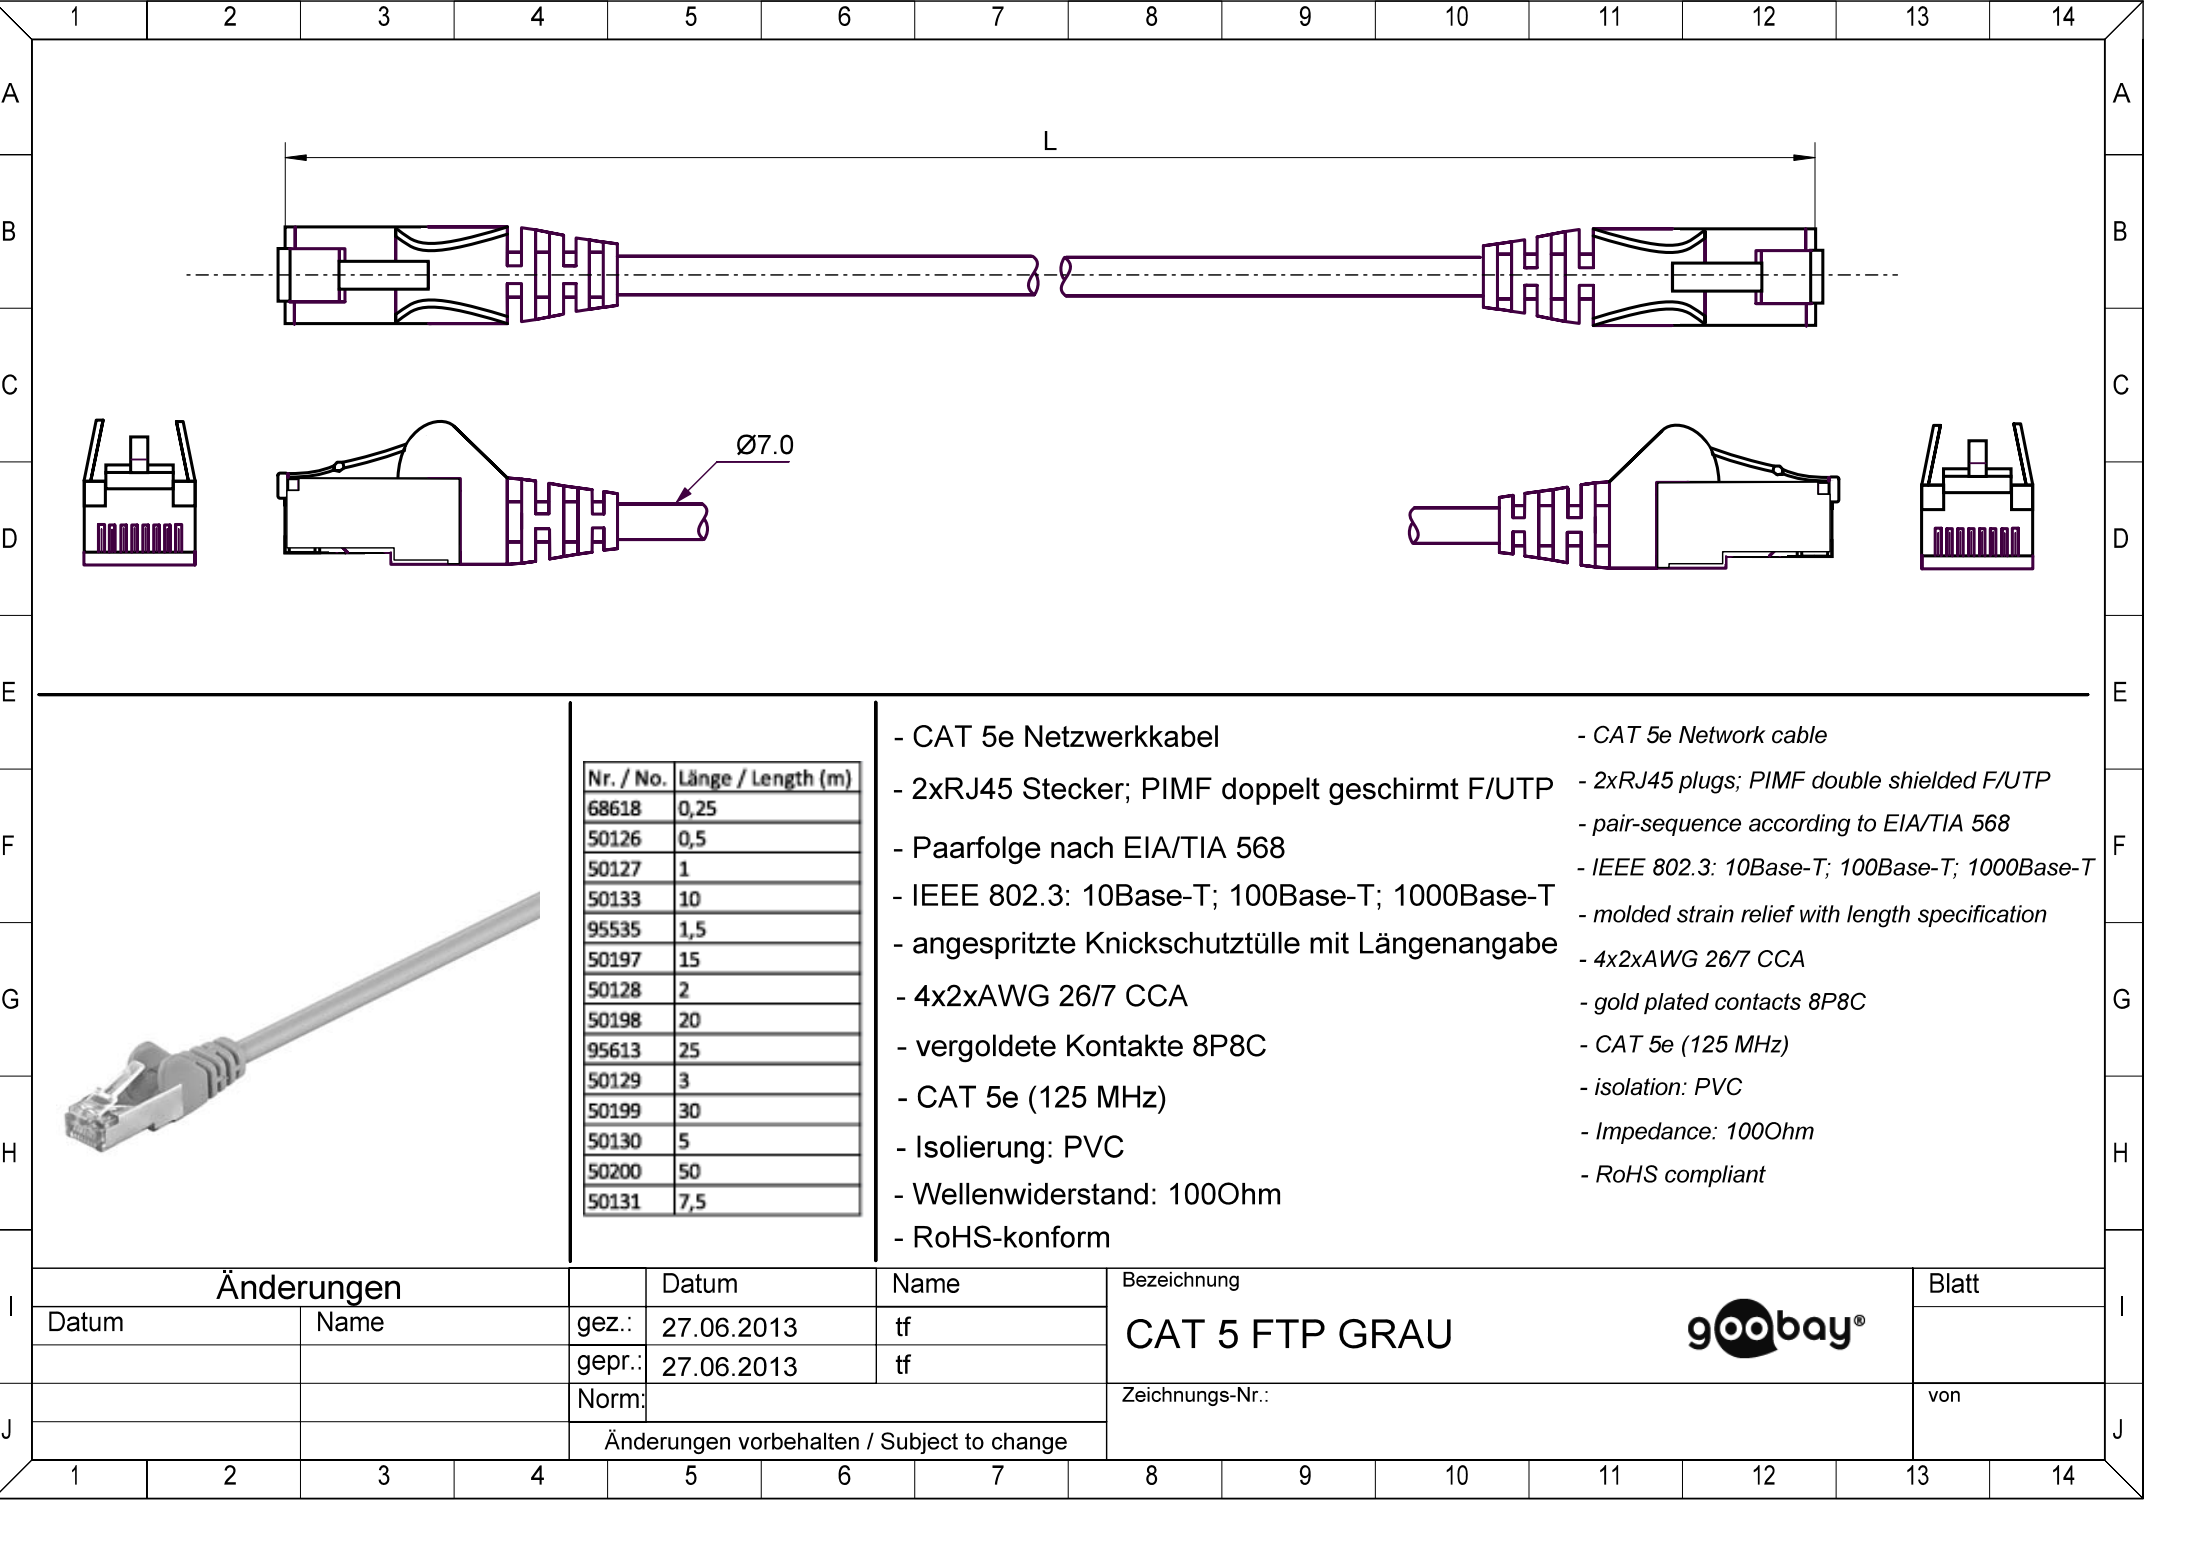

Nr. / No.	Länge / Length (m)
68618	0,25
50126	0,5
50127	1
50133	10
95535	1,5
50197	15
50128	2
50198	20
95613	25
50129	3
50199	30
50130	5
50200	50
50131	7,5

- CAT 5e Netzwerkkabel

- 2xRJ45 Stecker; PIMF doppelt geschirmt F/UTP

- Paarfolge nach EIA/TIA 568

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T

- angespritzte Knickschutztülle mit Längenangabe

- 4x2xAWG 26/7 CCA

- vergoldete Kontakte 8P8C

- CAT 5e (125 MHz)

- Isolierung: PVC

- Wellenwiderstand: 100Ohm

- RoHS-konform
- CAT 5e Network cable

- 2xRJ45 plugs; PIMF double shielded F/UTP

- pair-sequence according to EIA/TIA 568

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T

- molded strain relief with length specification

- 4x2xAWG 26/7 CCA

- gold plated contacts 8P8C

- CAT 5e (125 MHz)

- isolation: PVC

- Impedance: 100Ohm

- RoHS compliant

Änderungen			Datum	Name	Bezeichnung		Blatt
Datum	Name	gez.:	27.06.2013	tf	CAT 5 FTP GRAU		
		gepr.:	27.06.2013	tf			
		Norm:			Zeichnungs-Nr.:		von
		Änderungen vorbehalten / Subject to change					

