



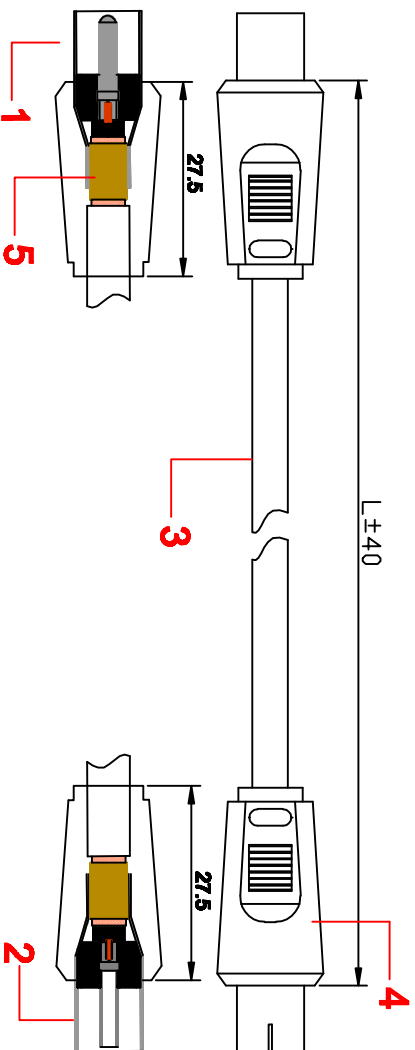


Construction

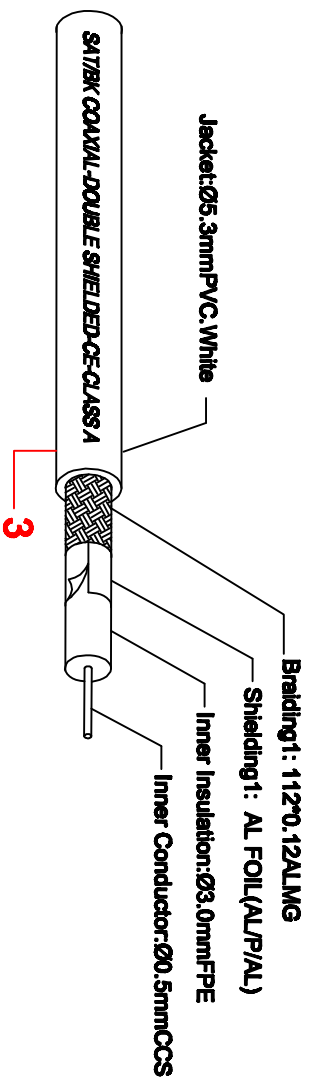

No	Item	Length	Packaging
50717	BK 0150	1.5m	1/10/80/160
50718	BK 0250	2.5m	1/10/80/120
50719	BK 0350	3.5m	1/10/40/80
50720	BK 0500	5.0m	1/10/30/80
50721	BK 0750	7.5m	1/5/20/40
50716	BK 1000	10	1/5/20/40

Wiring Method



1. dimensions As shown
2. Insulation resistance ≥ 100 up to 500V=
3. dielectric strength
2 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

5	Copper coil	ø4.5mm H13mm			2PCS
4	MOULDED1	PVC 4SP White			2*10g
3	CABLE	ø6.3 RG58 COAXIAL CABLE White(According to the client)			L
2	CONNECTOR82	COAX 9.5 Jack (Nickel plating 100%Shielded)			1set
1	CONNECTOR81	COAX 9.5 Plug (Nickel plating 100% Shielded)			1set
NO	Item Name	SPEC	QTY		
Edition	WEC000	Scale			
Designed by	ming hong	Item Name	COAX PLUG TO COAX JACK COAXIAL CABLE		
Checked by		Item NO	BK series cable		
Approved by		Unit: MM			
Date	11.28.2013				