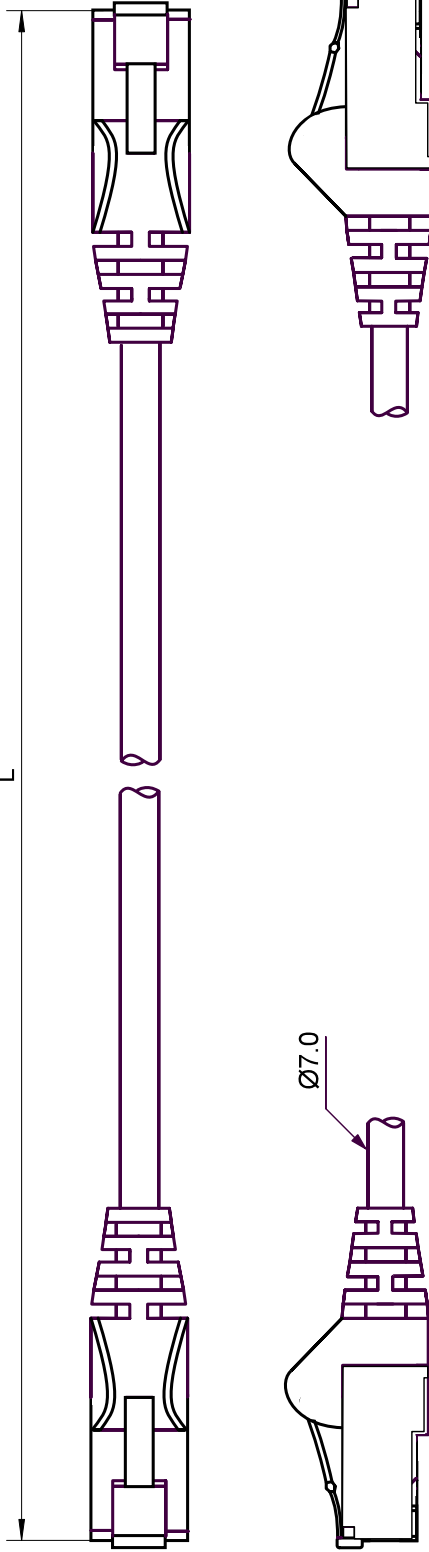
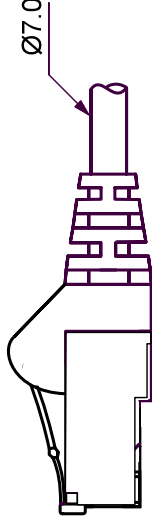
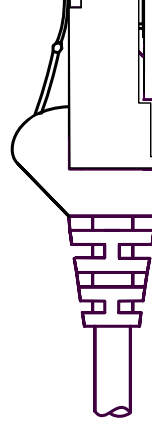



1	2	3	4	5	6	7	8	9	10	11	12	13	14																						
A	B	C	D	E	F	G	H	I	J																										
																																			
				<table border="1"><thead><tr><th>Nr. / No.</th><th>Länge / Length (m)</th></tr></thead><tbody><tr><td>95458</td><td>0.25</td></tr><tr><td>95468</td><td>0.5</td></tr><tr><td>95478</td><td>1.0</td></tr><tr><td>95572</td><td>1.5</td></tr><tr><td>95498</td><td>2.0</td></tr><tr><td>95508</td><td>3.0</td></tr><tr><td>95518</td><td>5.0</td></tr><tr><td>95528</td><td>7.5</td></tr><tr><td>95488</td><td>10.0</td></tr></tbody></table>				Nr. / No.	Länge / Length (m)	95458	0.25	95468	0.5	95478	1.0	95572	1.5	95498	2.0	95508	3.0	95518	5.0	95528	7.5	95488	10.0	- CAT 6 Netzwerkkabel; lose Ware - 2xRJ45 Stecker; PIMF doppelt geschirmt S/FTP - Paarfolge nach EIA/TIA 568 - angespritzte Knickschutzhülle mit Längenangabe - 4x2xAWG 27/7 CCA - vergoldete Kontakte 8P8C - CAT 6 (250 MHz) - Isolierung: PVC - Wellenwiderstand: 100Ohm - RoHS-konform				- CAT 6 Network cable; bulk - 2xRJ45 plugs; PIMF double shielded S/FTP - pair-sequence according to EIA/TIA 568 - molded strain relief with length specification - 4x2xAWG 27/7 CCA - gold plated contacts 8P8C - CAT 6 (250 MHz) - isolation: PVC - Impedance: 100Ohm - RoHS compliant			
Nr. / No.	Länge / Length (m)																																		
95458	0.25																																		
95468	0.5																																		
95478	1.0																																		
95572	1.5																																		
95498	2.0																																		
95508	3.0																																		
95518	5.0																																		
95528	7.5																																		
95488	10.0																																		
Änderungen				Datum				Name				Bezeichnung																							
Datum		Name		gez.:		08.08.2013		tf		CAT 6 LC S/FTP		Blatt																							
12.11.2013		tf		gepr.:		08.08.2013		tf		PIMF SCHWARZ																									
				Norm:						Zeichnungs-Nr.:		von																							
				Änderungen vorbehalten / Subject to change																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14																						