




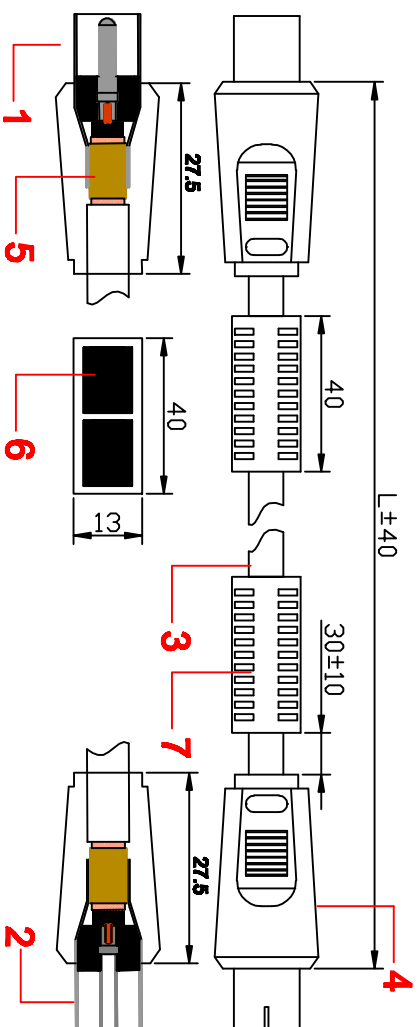

Construction

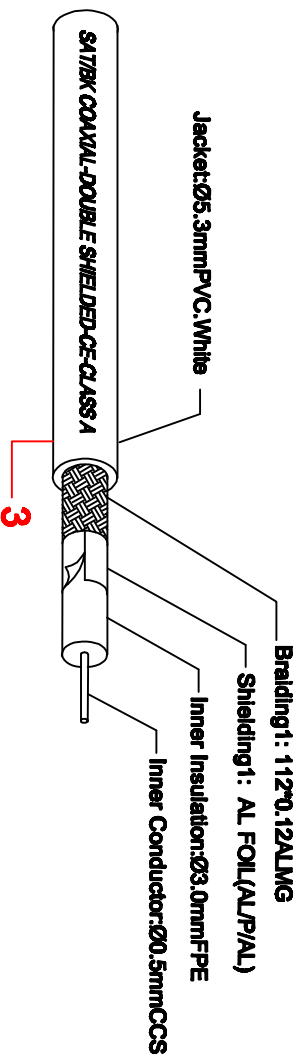

Wiring Method

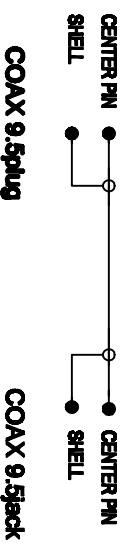

1. dimensions As shown
2. Insulation resistance ≥ 100 up to 500V=
3. dielectric strength
2 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

No	Item	Length	Packaging
50723	BKM 0150	1.5m	1/10/80/160
50724	BKM 0250	2.5m	1/10/80/120
50742	BKM 0350	3.5m	1/10/40/80
50725	BKM 0500	5.0m	1/10/30/60
50726	BKM 0750	7.5m	1/5/20/40
50722	BKM 1000	10	1/5/20/40

7	MOLDED2	PVC 4SP White	2*12g
6	FERRITE	Ø9.8mm H:13.5mm	4PCS
5	Copper coil	Ø4.5mm H:8mm	2PCS
4	MOLDED1	PVC 4SP White	2*10g
3	CABLE	Ø5.3 RG58 COAXIAL CABLE White(According to the chart)	L
2	CONNECTOR82	COAX 9.5 Jack (Nickel plating 100%Shielded)	1set
1	CONNECTOR81	COAX 9.5 Plug (Nickel plating 100% Shielded)	1set
NO	Item Name	SPEC	QTY
Edition	WEC/000	Scale	
Designed by	ming hong	Item Name	COAX PLUG TO COAX JACK COAXIAL CABLE WITH FERRITE
Checked by		Item NO	BKM series cable
Approved by		Unit	MM
Date	11.28.2013		