


INLINE® PATCHKABEL FLACH, U/FTP, CAT.6A, TPE HALOGENFREI, GRAU



- Flaches Patchkabel
- U/FTP Geschirmt: Paarweise in Metallfolie (PiMf)
- Erfüllt die Cat.6A Anforderungen bis 500MHz
- Vier Aderpaare, verdreht
- Vollkupferlitzen
- 1:1 Belegung, farbcodiert nach EIA/TIA-568B
- 2x RJ45 Stecker, vergossen, mit Rastnasenschutz
- Blau eingefärbter Stecker zur Unterscheidung
- Halogenfreier TPE Mantel
- flexibel und einfach zu verlegen
- in PE-Tüte mit EAN Code

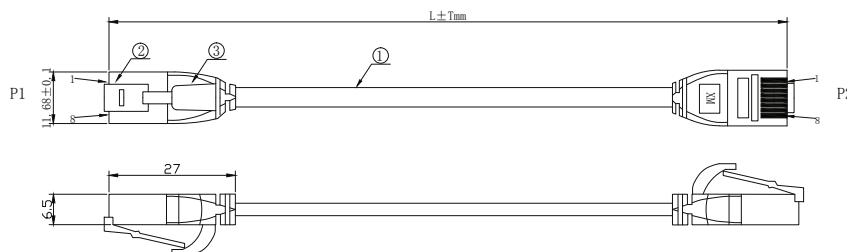

PIN OUT

CN1 (568B)		CN2 (568B)
WHITE-ORANGE 1	—	1 WHITE-ORANGE
ORANGE 2	—	2 ORANGE
WHITE-GREEN 3	—	3 WHITE-GREEN
GREEN 6	—	6 GREEN
BLUE 4	—	4 BLUE
WHITE-BLUE 5	—	5 WHITE-BLUE
WHITE-BROWN 7	—	7 WHITE-BROWN
BROWN 8	—	8 BROWN
SHELL	—	SHELL

④	Over mold	75A PVC(Same color as wire)	2
⑤	Plug	RJ45 8P8C'S SHIELDED THE SHELL PLATED NICKEL, PIN GOLD PLATED 3u" TRANSPARENT Blue	2
⑥	CABLE	CAT. 6A U/FTP (32AWG BC*1P+AL-FOIL)*4PAIRS+DRAIN(AL-MG)+JACKET: Super Soft Halogenfree TPE(IEC 60754-2), OD: 6.5*2.0 ± 0.2mm	1
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y

- 1.100% open short & miss wire test;
- 2.Fluke channel test:
ISO11801 channel class Ea
- 3.RoHS2.0 AND REACH compliant
- 4.PRINT WORD:InLine CAT. 6A U/FTP FLAT TPE 500MHz
4x2x32AWG/7 ISO11801 & EN50173 & ANSI/TIA568C. 2
- 5.Operating temperature:-20℃~+75℃

Art. Nr.	Länge	EAN
75701	1 m	4043718294893
75714	1,50 m	4043718294909
75702	2 m	4043718294916
75703	3 m	4043718294923
75705	5 m	4043718294930
75707	7,50 m	4043718294947
75700	10 m	4043718294954
75715	15 m	4043718294961
75720	20 m	4043718294978

