




Weight		CUSTOMER NO:	REMARK
g-K1			

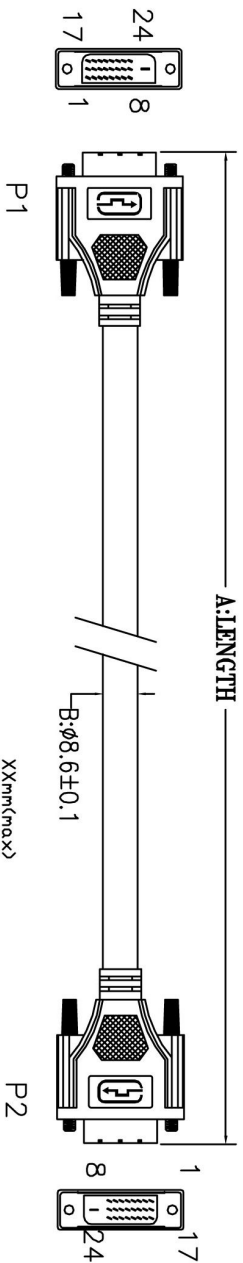

- NOTES:
- 1) PRIMARY DIM:A,C,D
 - 2) INSULATION RESISTANCE:50M Ω (MIN) 300V/DC
 - 3) CONTACT RESISTANCE:5 Ω (MAX)
 - 4) HI-POT:500V AC
 - 5) PLUG GOLD

1	UT-20276(30#1P+A+D+MT)*7+28#1P+28#3C+A+D+B(128B,AM) OD:8.6MM BLACK(1101)	ROHS XXXXXM
2	DVI-24P+1 BLACK SOLDER TYPE BRASS TERMINAL&SHELL PLATED GOLD W/METAL HOOD OD:9.5MM(ROHS)	

A	FIRST EDITION	18/12/07
REV. ECR	DESCRIPTION	C.N. DATE

RM Computertechnik

TITLE		DVI CABLE	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		CONF.	
DIMENSIONS		TOLERANCE	
0.00 TO 30.00mm		±0.10mm	
30.01 TO 80.00mm		±0.13mm	
80.01 TO 150.00mm		±0.15mm	
150.01mm +		±0.20mm	
MATERIAL		PART NO.	2162-XXXX
FINISH		SCALE	1/1
		SHEET	1/1
		UNIT	MM
		SIZE	A4
		REV.	A