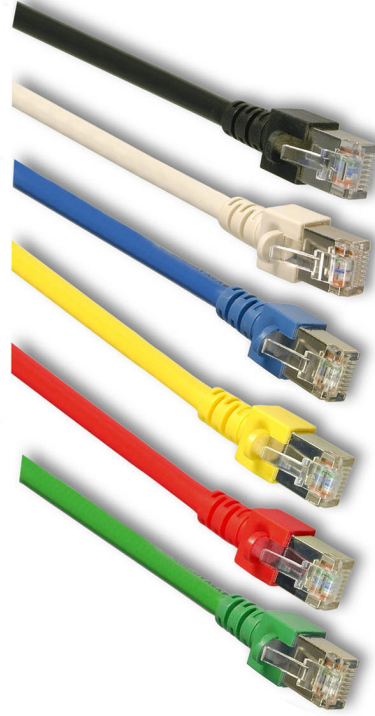

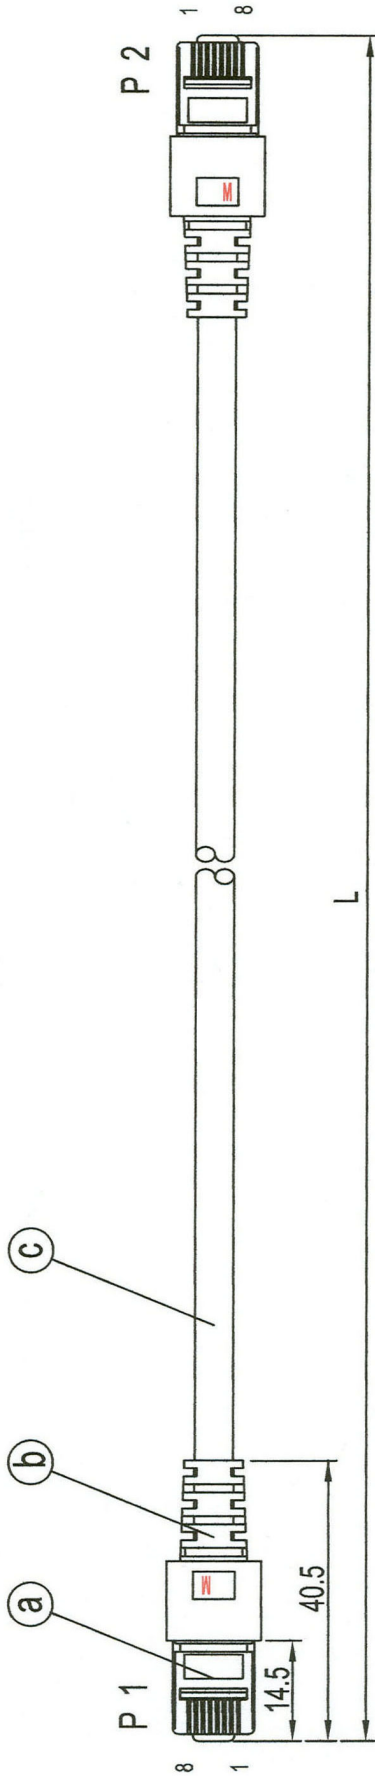


EFB NO.	COLOR
K5453.X	GREY
K5461.X	GREEN
K5462.X	BLUE
K5463.X	YELLOW
K5464.X	RED
K5465.X	BLACK

ALL LENGTH (L)
500mm±5
1000mm±10
1500mm±15
2000mm±20
3000mm±30
5000mm±50
7500mm±75
10000mm±100
15000mm±150
20000mm±200
25000mm±250
30000mm±300

C	CABLE	FTP CAT.5E 26AWG stranded 4pairs cable PVC OD=5.6mm Printing : FTP 300 CAT.5E 26AWGX4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED PVC SHEATH: FLAME RETARDANT ACC. TO IEC60332-1 SILICONE FREE	L mm
b	OVERMOLD	PVC 75A / LENGTH IMPRINT ON BOOT	8 g
a	CONNECTOR	RJ45 8P8C'S SHIELDED GOLD PLATED 3-50u"	2 Pcs
NO.	MAT.NAME	DESCRIPTION	Q'TY

ROHS COMPLIANT

Impedance	Nom. 1000hm+20%
Frequency MHZ	1 4 8 10 16 20 25 31.25 62.5 100
NEXT DB	62.3 52.3 48.8 47.3 44.2 42.8 41.3 39.9 35.4 32.3
Attenuation DB/100m	2.4 4.9 7.0 7.8 9.8 11.1 12.5 14.0 20.4 26.4
Return Loss DB	17.0 18.8 19.7 20.0 20.0 20.0 19.3 18.6 16.5 15.1

ITEM	K54XX.X
DRAWING	FTP 26AWG PATCH CORD
UNIT	mm
DRAWN BY	CHECK BY
APPRO BY	DATE
	2006.11.30

m c

