


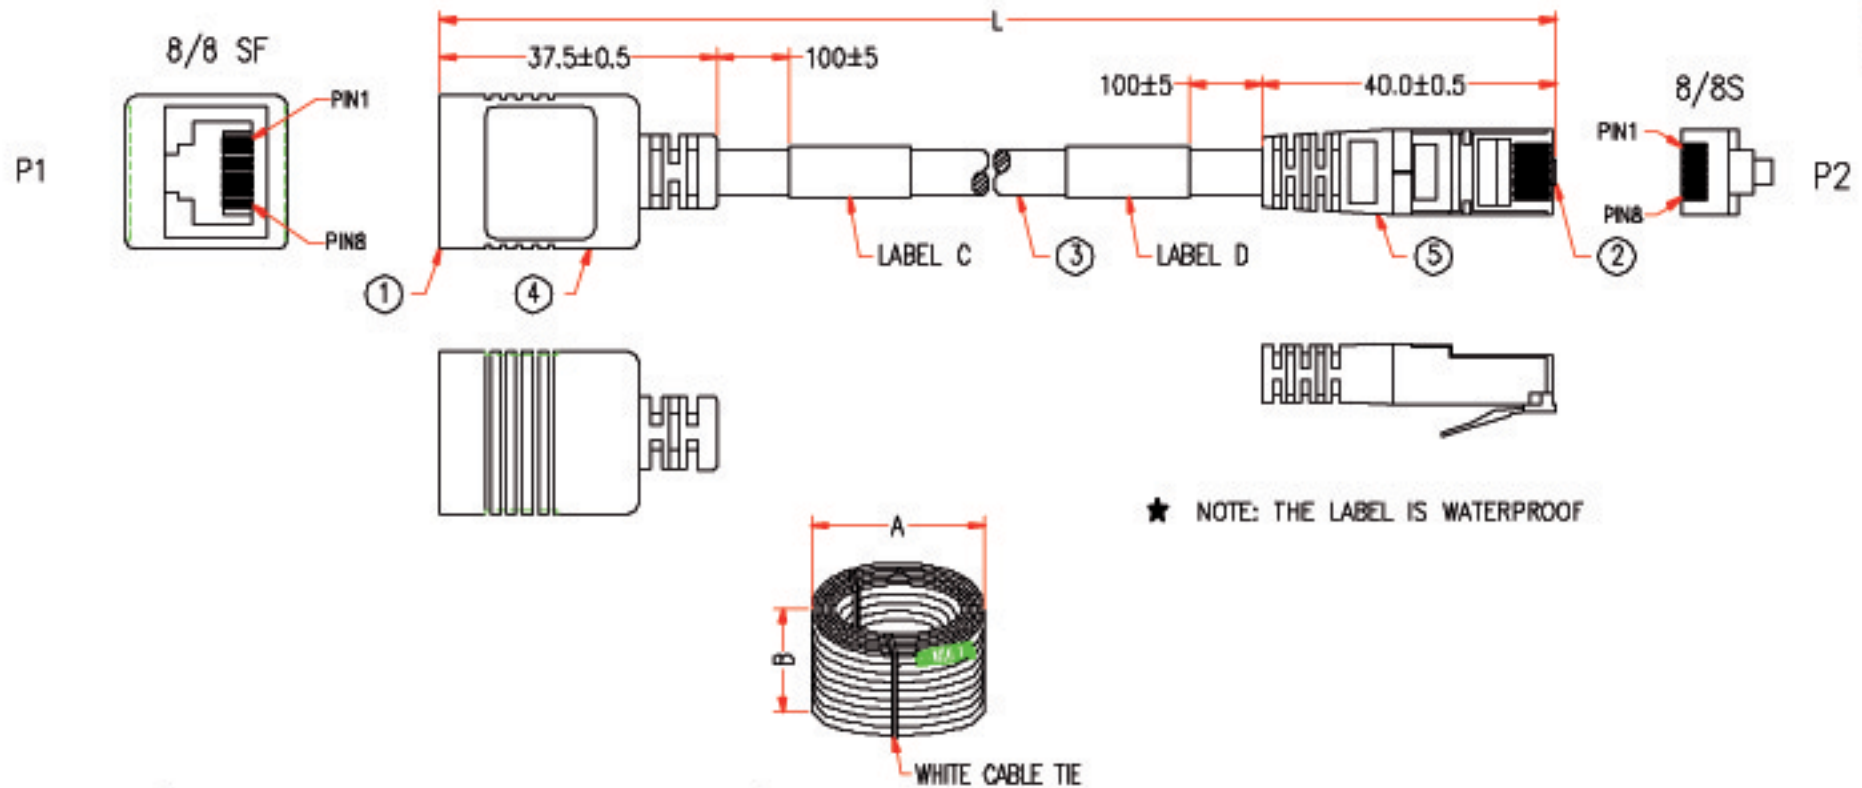

| P1     | P2             |
|--------|----------------|
| 1      | 1 ORANGE/WHITE |
| 2      | 2 ORANGE       |
| 3      | 3 GREEN/WHITE  |
| 6      | 6 GREEN        |
| 4      | 4 BLUE         |
| 5      | 5 BLUE/WHITE   |
| 7      | 7 BROWN/WHITE  |
| 8      | 8 BROWN        |
| SHIELD | SHIELD         |

|                    |       |
|--------------------|-------|
| Cable Length       |       |
| Unless Other Spec. |       |
| Tolerances:        |       |
| 0 ~ 200mm          | ±10mm |
| 201 ~ 1000mm       | ±20mm |
| 1001 ~ 1500mm      | ±25mm |
| 1501 ~ 2100mm      | ±30mm |
| 2100mm             | ±40mm |

| 5   | MOLDED PVC GREY                                                  |      |
|-----|------------------------------------------------------------------|------|
| 4   | MOLDED PE COLOR TRANSPARENT                                      |      |
|     | MOLDED PVC GREY                                                  |      |
| 3   | 4 TWISTED PAIRS CAT.5E 24AWG STP, OD 6.2mm, JACKET GREY          | L    |
| 2   | 8PBC MODULAR SHIELDED PLUG, GOLD PLATING 50u" ON CONTACTS        | 1    |
| 1   | 8PBC JACK WITH SHIELDED, GOLD PLATING 50u" ON CONTACTS, PCB TYPE | 1    |
| No. | DESCRIPTION                                                      | Q'TY |