

MARKING:

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+20AWG/2C (UL) TYPE CM 75°C


⚠ The cable must accord:

Operating temperature: between -20°C and +80°C

Storage temperature: between -40°C and +85°C

* NOTE: All relevant materials are complied with RoHS directive .

⚠ This cable is silicone free.

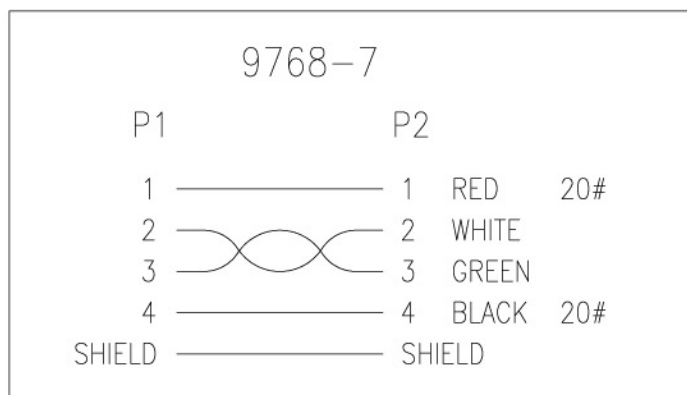

5	MOLDED PVC BLACK		M304
4	MOLDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 20AWG, BRAID 80%, OD 5.0mm, JACKET BLACK, .DRAWING No. EUAB2801P2002C-096	L-20mm	M304
2	USB B MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT TYPE	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT TYPE	1	M108
No.	DESCRIPTION	Q'TY	Supplier

PART NO. 9768-7		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
APPROVED		RM Computertechnik GmbH			
CHECKED	HU				
DRAWING	WANG				
DATE	21/MAY/09	ITEM NO.		UNIT:mm	

⚠ REV.4 2009.5.21	ADD Operating temperature&Storage temperature
⚠ REV.3 2009.3.19	ADD LENGTH 0.5M AND THIS CABLE IS SILICONE FREE
⚠ REV.2 2008.4.10	MODIFY LENGTH FOR 2M TO 1.8M
⚠ RE.1 2008.1.08	ADD LENGTH

CHECKED